


## DURABASE® Rectangular Shower Floors



### Single Threshold

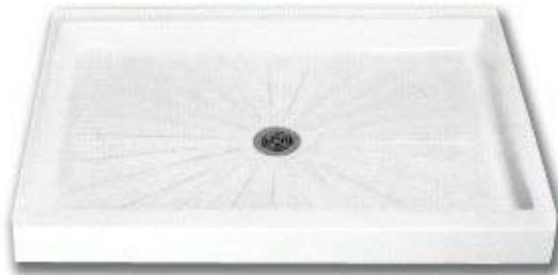

- Sturdy, 1-Piece Molded Fiberglass Construction — ribbed underbody for extra strength, slip resistant surface
- Integral molded drain with seal for connection to 2" Sch. #40 ABS, PVC or iron DWV sanitary drain pipe. See optional drain seal for 1-1/2" pipe and 2" copper — removable strainer
- Available in White, Biscuit and Bone
- Semi-gloss Surface — resistant to mold and mildew, easy to clean
- Designed to be used with Mustee's DURAWALL® Shower Walls, Ceramic Tile or Preformed Wall Kit

#### Code Accepted



DURABASE® Shower Floors meet or exceed performance requirements:

- IAPMO® Listed — file numbers: Shower Floor — #1453; Drain — #1251 and #1635 
- HUD/FHA — UM-73
- American National Standards Institute (ANSI) — Specification Z124.2
- Warnock Hersey Listed — CSA test standards: Shower Floor — #B45.0 and #B45.5 
- American Society of Testing & Materials (ASTM) — D 635, E 84 and E 162

#### SPECIFICATIONS

Model No.	Nom. Size	Color	UPC	A	B	C	D
3248M	32"x48"	White	6 71031 00085 9	48"	32"	16"	24"
3248BN	32"x48"	Bone	6 71031 00083 5	48"	32"	16"	24"
3248BT	32"x48"	Biscuit	6 71031 00351 5	48"	32"	16"	24"
3254M	32"x54"	White	6 71031 00091 0	54"	32"	16"	27"
3260M	32"x60"	White	6 71031 00094 1	60"	32"	16"	30"
3442M	34"x42"	White	6 71031 00105 4	42"	34"	17"	21"
3442BN	34"x42"	Bone	6 71031 00103 0	42"	34"	17"	21"
3442BT	34"x42"	Biscuit	6 71031 00369 0	42"	34"	17"	21"
3448M	34"x48"	White	6 71031 00112 2	48"	34"	17"	24"
3448BN	34"x48"	Bone	6 71031 00108 5	48"	34"	17"	24"
3448BT	34"x48"	Biscuit	6 71031 00352 2	48"	34"	17"	24"
3454M	34"x54"	White	6 71031 00118 4	54"	34"	17"	27"
3454BN	34"x54"	Bone	6 71031 00116 0	54"	34"	17"	27"
3460M	34"x60"	White	6 71031 00123 8	60"	34"	17"	30"
3460BN	34"x60"	Bone	6 71031 00121 4	60"	34"	17"	30"
3460BT	34"x60"	Biscuit	6 71031 00376 8	60"	34"	17"	30"
4236M	42"x36"	White	6 71031 00344 7	36"	42"	21"	18"
4236BN	42"x36"	Bone	6 71031 00345 7	36"	42"	21"	18"

### Sectional View

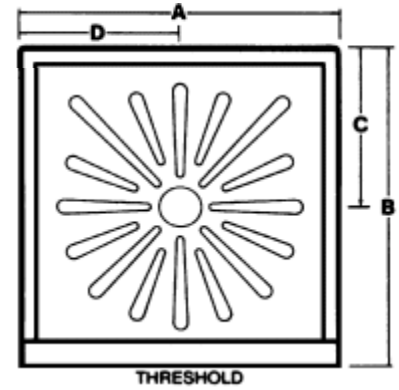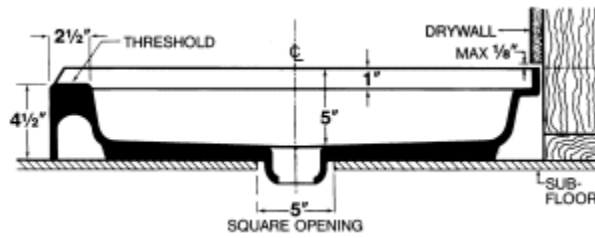

General: Furnish and install as shown on plans DURABASE® Shower Floor model \_\_\_\_\_, as manufactured by E.L. Mustee & Sons, Inc. Floor to be one-piece, molded fiberglass, made with matched metal molds. Surface to be slip-resistant Starburst® design that does not interfere with the flow of water. Size \_\_\_\_ x \_\_\_\_\_. Shoulder will be no less than 3" high or less than 1" wide. Tiling flange will extend not less than 1" higher than the threshold which provides an integral molded water barrier. Threshold will be not less than 4-1/2" high. Molded-in drain and drain seal for installation of 2" iron DWV (Sch. 40), PVC or ABS sanitary drain pipe. Removable strainer. Color \_\_\_\_\_ (White, Bone, Biscuit). Install in compliance with local codes.