



Laminate Stair Renewal System

Lamine Sistema de Cobertura
de Paso de Escalera

Update carpeted or worn-out stairs

- Durable laminate with pre-attached stair nosing
- Easy glue-down installation
- Cost-effective way to add value to your home

La actualización alfombró o
se desgastó escalera

- El laminado duradero con nosing de escalera de preattached
- Fácil pega instalación
- Cueste effetive manera de agregar valor a su casa



(limited residential warranty)

Installation Instructions

Instrucciones de instalación



REQUIRED TOOLS AND MATERIALS

Herramientas y Materiales necesarios



Table saw or hand saw

Posponga serrote o la mano vie



Carbide-tipped circular saw blades

Hojas de sierra circular de carburo-inclín



Urethane-based construction adhesive

Adhesivo de construcción de Urethane-basó



Vacuum

Limpie con aspiradora limpiador



Tape measure

Grabe medida



Safety glasses

Gafas de seguridad




Gloves

Guantes

1 PREPARE

Remove the carpeting or covering that is currently in place on the stair. Ensure that all tread surfaces are clean, dry and free from uneven surface defects.


PREPARAR: Quite la alfombra o el revestimiento que tenga la escalera actualmente. Asegúrese de que la superficie de todas las huellas esté limpia, seca y lisa, sin desperfectos.

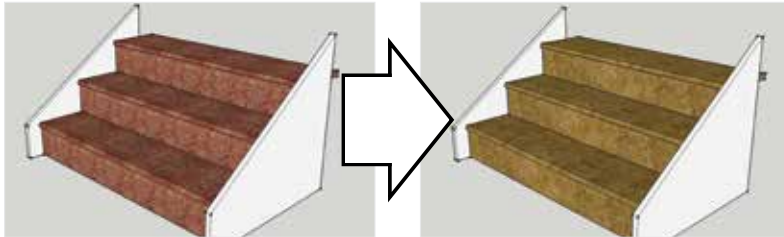

2 MEASURE

Measure the WIDTH and DEPTH of the existing tread. Depth is from the edge of the bullnose protrusion to the face of the existing riser.

MEDIR: Mida el ANCHO y la PROFUNDIDAD de la huella existente. La profundidad se mide desde el borde del voladizo hasta la cara de la contrahuella existente.

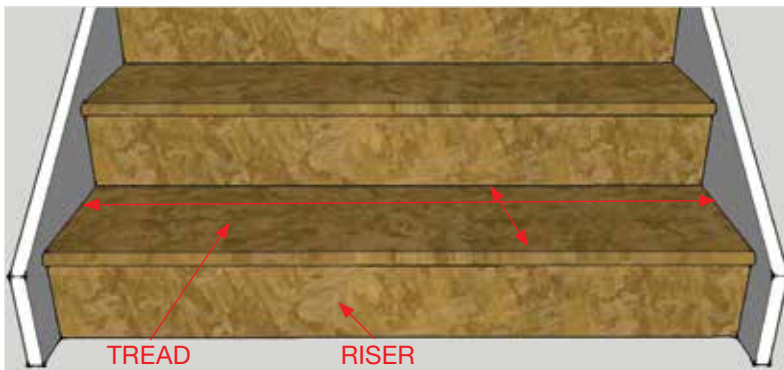

3 CHECK FIT


Use the measurements of the width and depth of your existing treads to guide where to cut the CAP-A-TREAD for a precise fit.

VERIFICAR EL CALCE: Utilice las medidas del ancho y la profundidad de las huellas existentes como guía para indicar por dónde debe recortar el CAP-A-TREAD para lograr un calce preciso.

4 SET IN PLACE

Using construction adhesive, secure CAP-A-TREAD in place.


COLOCAR EN EL LUGAR: Con adhesivo de construcción, asegure el CAP-A-TREAD en su lugar.

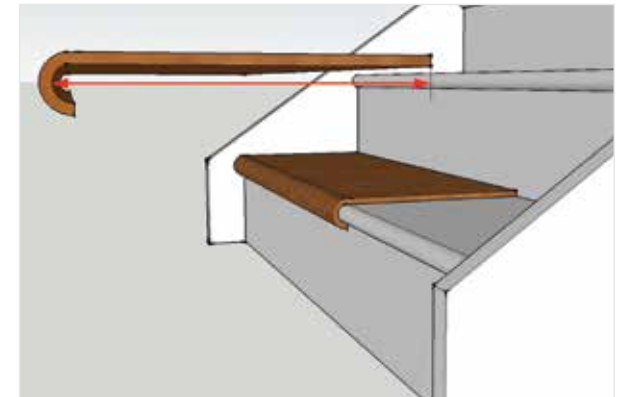

Risers

Risers are available from CAP-A-TREAD to complement your chosen finish, or in white. After CAP-A-TREAD treads are in place, measure width and height of the area to be covered and cut riser for a precise fit. Use construction adhesive to secure fit.

CONTRAHUELLAS: Hay contrahuellas de CAP-A-TREAD disponibles para complementar el acabado de su elección y, también, en color blanco. Tras colocar las huellas de CAP-A-TREAD en su lugar, mida el ancho y la altura del área por cubrir y corte la contrahuella para lograr un calce preciso. Utilice adhesivo de construcción para asegurar el calce.

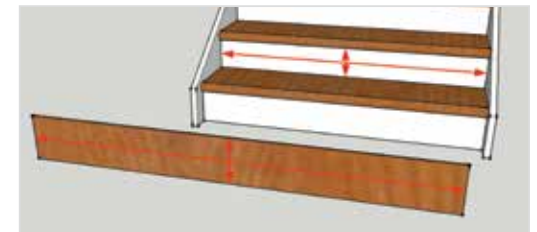

Open End Returns

If the stair tread you are capping is open on either side, then order the appropriate LEFT or RIGHT return.

VOLADIZO LATERAL SOBRESALIENTE: Si las huellas de la escalera que está cubriendo tienen un voladizo que sobresale en alguno de sus lados, entonces haga un pedido para solicitar el voladizo lateral correspondiente, IZQUIERDO o DERECHO.

