Tae 3 and 5 Bath

980TAEB

BA1082, BA1083 1.0



GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes.




This product is suitable for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

Install the Fixture






CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

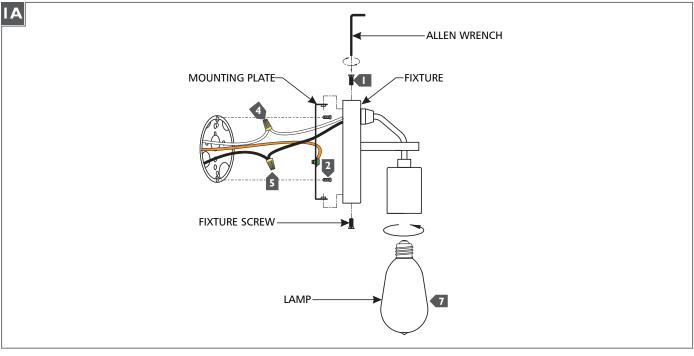

- Remove the fixture screws located on the top and bottom of the fixture base using the provided Allen Wrench, then remove the mounting plate from the fixture base.
- 2 Install the mounting plate onto the electrical box with the two #8-32 screws provided.
- 3 Connect the fixture to suitable ground in accordance with local electrical codes.
- 4 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5 Connect the black fixture wire to the hot power line wire with a wire nut.
- 6 Properly place all wires and wire nut connections into the electrical box, mount the fixture back onto the mounting plate, and reinstall fixture screws (reversal of step 1).
- **7** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage information.



7400 Linder Ave, Skokie, IL 60077 800.323.3226 - 847.626.6300

www.lbllighting.com

© 2018 LBL Lighting.All rights reserved.The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification. A Generation Brands Company

SAVETHESE INSTRUCTIONS!